

# **ECE 171A: Linear Control System Theory**

## **Lecture 10: Input/output system responses (I)**

Yang Zheng

Assistant Professor, ECE, UCSD

April 22, 2024

# Outline

Linear properties of LTI systems

Initial response - matrix exponential

Step, impulse and frequency responses

Summary

# Outline

Linear properties of LTI systems

Initial response - matrix exponential

Step, impulse and frequency responses

Summary

## Linear time-invariant (LTI) systems

An LTI system is in the form of

$$\dot{x} = Ax + Bu$$

$$y = Cx + Du$$

- ▶  $x \in \mathbb{R}^n$ : state;  $y \in \mathbb{R}^p$ : output;  $u \in \mathbb{R}^m$ : input;
- ▶  $A \in \mathbb{R}^{n \times n}$ ,  $B \in \mathbb{R}^{n \times m}$ ,  $C \in \mathbb{R}^{p \times n}$ ,  $D \in \mathbb{R}^{p \times m}$  are constant matrices.







Two important features

- ▶ **Linear:**  $f(x, u) = Ax + Bu$  and  $h(x, u) = Cx + Du$  are linear functions
- ▶ **Time-invariant:**  $A, B, C, D$  do not change over time.

The output  $y(t)$  has very nice **linear properties** in the following sense

- ▶ Zero initial state  $x(0) = 0$ : *the output  $y(t)$  is linear in input  $u(t)$ ;*
- ▶ Zero input  $u(t) = 0$ : *the output  $y(t)$  is linear in initial states  $x(0)$ .*

## Case 1: Zero initial state $x(0) = 0$



## Case 1: Zero initial state $x(0) = 0$

**Fact 1:** Zero initial state  $x(0) = 0$ . The output  $y(t)$  is linear in input

$$\begin{cases} u_1(t) \rightarrow y_1(t) \\ u_2(t) \rightarrow y_2(t) \end{cases} \implies \alpha u_1(t) + \beta u_2(t) \rightarrow \alpha y_1(t) + \beta y_2(t)$$

**Proof:** Denote the state trajectories for  $u_1(t)$  as  $x_1(t)$ , and for  $u_2(t)$  as  $x_2(t)$ .

- ▶ By definition, we have

$$\dot{x}_1(t) = Ax_1(t) + Bu_1(t), \quad \dot{x}_2(t) = Ax_2(t) + Bu_2(t),$$

- ▶ Let  $x = \alpha x_1 + \beta x_2$ , and verify  $x(t)$  is a solution if  $u(t) = \alpha u_1(t) + \beta u_2(t)$
- ▶ **Step 1:** the initial condition  $x(0) = \alpha x_1(0) + \beta x_2(0) = 0$  is satisfied.
- ▶ **Step 2:** it is easy to verify that

$$\begin{aligned} \dot{x} &= \alpha \dot{x}_1 + \beta \dot{x}_2 = \alpha(Ax_1 + Bu_1) + \beta(Ax_2 + Bu_2) \\ &= A(\alpha x_1 + \beta x_2) + B(\alpha u_1(t) + \beta u_2(t)) \\ &= Ax + Bu. \end{aligned}$$

## Case 1: Zero initial state $x(0) = 0$

**Fact 1:** Zero initial state  $x(0) = 0$ . The output  $y(t)$  is linear in input

$$\begin{cases} u_1(t) \rightarrow y_1(t) \\ u_2(t) \rightarrow y_2(t) \end{cases} \implies \alpha u_1(t) + \beta u_2(t) \rightarrow \alpha y_1(t) + \beta y_2(t)$$

**Proof:**

► Finally, we have

$$\begin{aligned} y(t) &= Cx(t) + Du(t) \\ &= C(\alpha x_1 + \beta x_2) + D(\alpha u_1 + \beta u_2) \\ &= \alpha(Cx_1 + Du_1) + \beta(Cx_2 + Du_2) \\ &= \alpha y_1(t) + \beta y_2(t). \end{aligned}$$

► Therefore, we have proved that



$$\alpha u_1(t) + \beta u_2(t) \rightarrow \alpha y_1(t) + \beta y_2(t)$$

## Immediate corollary



Given any LTI system with zero initial condition, *its system response scales with the input amplitude*

- ▶ If the input signal becomes twice as strong, then the strength of output will also double.
- ▶ This allows us to use ratios and percentages in *step* or *frequency* response. These are independent of input amplitudes.

**Case 1:**



**Case 2:**





## Case 2: Zero input $u(t) = 0$

**Fact 2:** Zero input  $u(t) = 0$ . The output  $y(t)$  is linear in the initial conditions

$$\begin{cases} x(0) \rightarrow y_1(t) \\ \hat{x}(0) \rightarrow y_2(t) \end{cases} \implies \alpha x(0) + \beta \hat{x}(0) \rightarrow \alpha y_1(t) + \beta y_2(t)$$

**Proof:** Denote the state trajectories for  $x(0)$  as  $x_1(t)$ , and for  $\hat{x}(0)$  as  $x_2(t)$ .

- ▶ By definition, we have

$$\dot{x}_1(t) = Ax_1(t), \quad \dot{x}_2(t) = Ax_2(t),$$

- ▶ Let  $x = \alpha x_1 + \beta x_2$ , and verify  $x(t)$  is a solution.
- ▶ Step 1: the initial condition  $x(0) = \alpha x_1(0) + \beta x_2(0)$  is satisfied.
- ▶ Step 2: it is easy to verify that

$$\dot{x} = \alpha \dot{x}_1 + \beta \dot{x}_2 = \alpha Ax_1 + \beta Ax_2 = A(\alpha x_1 + \beta x_2) = Ax.$$


- ▶ Step 3:

$$y(t) = Cx(t) = C(\alpha x_1 + \beta x_2) = \alpha y_1(t) + \beta y_2(t)$$


## Case 2: Zero input $u(t) = 0$

**Fact 2:** Zero input  $u(t) = 0$ . The output  $y(t)$  is linear in the initial conditions


$$\begin{cases} x(0) \rightarrow y_1(t) \\ \hat{x}(0) \rightarrow y_2(t) \end{cases} \implies \alpha x(0) + \beta \hat{x}(0) \rightarrow \alpha y_1(t) + \beta y_2(t)$$

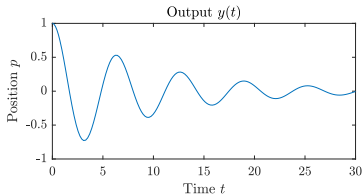

(a) Initial condition  $x(0)$

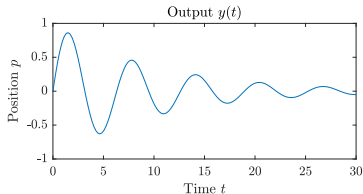

(b) Initial condition  $\hat{x}(0)$

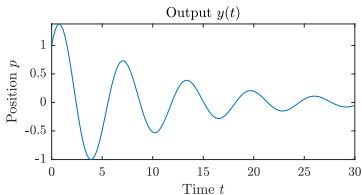

(c) Initial condition  $x(0) + \hat{x}(0)$

# Why are LTI systems important?

## ▶ Many important examples

- Electronic circuits (e.g., RLC circuits).
- Many mechanical systems (e.g., spring-mass system).

## ▶ Many important tools

- Step, impulse, and frequency responses. These are classical tools of control theory (developed in 1930's at Bell labs).
- Classical control design toolbox, e.g., Bode/Nyquist plots, gain/phase margins, loop shaping.
- Optimal control and estimators, e.g., linear quadratic regulator (LQR), and Kalman estimators.
- Robust control design, e.g.,  $\mathcal{H}_2/\mathcal{H}_\infty$  control design and  $\mu$  analysis for structural uncertainty.

## ▶ Foundation to nonlinear system analysis and control (linearization etc.)

# Outline

Linear properties of LTI systems

**Initial response - matrix exponential**

Step, impulse and frequency responses

Summary

# Matrix exponential

## Explore the initial condition response using the matrix exponential

- ▶ Consider a scalar system  $\dot{x} = ax$  with initial condition  $x(0) \in \mathbb{R}$ .
- ▶ Its solution is  $x(t) = e^{at}x(0)$ .

## Theorem

*The solution to the homogeneous system of differential equations*

$$\dot{x} = Ax, \quad x(0) \in \mathbb{R}^n$$

*is given by*

$$x(t) = e^{At}x(0).$$

## Definition

The matrix exponential is defined as

$$e^X = I + X + \frac{1}{2}X^2 + \frac{1}{3!}X^3 + \dots = \sum_{k=0}^{\infty} \frac{1}{k!}X^k. \quad (1)$$

where  $X \in \mathbb{R}^{n \times n}$  and  $I$  is the  $n \times n$  identity matrix.

## Matrix exponential: Proof

- **Step 1:** Replacing  $X$  in (1) with  $At$  where  $t \in \mathbb{R}$ , we have

$$e^{At} = I + At + \frac{1}{2}A^2t^2 + \frac{1}{3!}A^3t^3 + \dots = \sum_{k=0}^{\infty} \frac{1}{k!}A^k t^k.$$

- **Step 2:** differentiating this expression with respect to  $t$  gives

$$\begin{aligned} \frac{d}{dt}e^{At} &= 0 + A + \frac{1}{1}A^2t + \frac{1}{2!}A^3t^2 + \dots \\ &= A(I + At + \frac{1}{2}A^2t^2 + \frac{1}{3!}A^3t^3 + \dots) \\ &= A \sum_{k=0}^{\infty} \frac{1}{k!}A^k t^k \\ &= Ae^{At}. \end{aligned}$$

- **Step 3:** we find that

$$\frac{d}{dt} \underbrace{e^{At} x(0)}_{x(t)} = A \underbrace{e^{At} x(0)}_{x(t)} \implies \frac{d}{dt}x(t) = Ax(t).$$

- **Final step:** initial condition  $x(0) = e^{A \times 0}x(0)$  matches.

## Corollary: linear in initial conditions

### Theorem

*The solution to the homogeneous system of differential equations*

$$\dot{x} = Ax, \quad x(0) \in \mathbb{R}^n$$

*is give by*

$$x(t) = e^{At}x(0).$$

It is immediate to see that the solution is linear in the initial condition

$$\begin{aligned}x(t) &= e^{At}(\alpha x_0 + \beta \hat{x}_0) \\ &= \alpha e^{At}x_0 + \beta e^{At}\hat{x}_0 \\ &= \alpha x_1(t) + \beta x_2(t)\end{aligned}$$

## Example: double integrator

### Example

Consider a simple second-order system

$$\ddot{q} = u, \quad y = q.$$

- ▶ It is called a double integrator because  $u(t)$  is integrated twice
- ▶ We write  $x = (q, \dot{q})$ , and

$$\frac{d}{dt}x = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} x + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u$$

- ▶ By direct computation, we find  $A^2 = 0$ , and thus

$$e^{At} = I + At = \begin{bmatrix} 1 & t \\ 0 & 1 \end{bmatrix}$$

- ▶ When  $u = 0$ , the solution is

$$x(t) = \begin{bmatrix} 1 & t \\ 0 & 1 \end{bmatrix} \begin{bmatrix} x_1(0) \\ x_2(0) \end{bmatrix} = \begin{bmatrix} x_1(0) + tx_2(0) \\ x_2(0) \end{bmatrix}$$



## Example: Undamped oscillator

### Example

Consider an spring-mass system with zero damping

$$\ddot{q} + \omega_0^2 q = u.$$

- ▶ Let  $x_1 = q, x_2 = \dot{q}/\omega_0$ . We have

$$\frac{d}{dt}x = \underbrace{\begin{bmatrix} 0 & \omega_0 \\ -\omega_0 & 0 \end{bmatrix}}_A x + \begin{bmatrix} 0 \\ 1/\omega_0 \end{bmatrix} u \implies e^{At} = \begin{bmatrix} \cos \omega_0 t & \sin \omega_0 t \\ -\sin \omega_0 t & \cos \omega_0 t \end{bmatrix}$$

- ▶ This can be verified by differentiation

$$\frac{d}{dt}e^{At} = \begin{bmatrix} 0 & \omega_0 \\ -\omega_0 & 0 \end{bmatrix} \begin{bmatrix} \cos \omega_0 t & \sin \omega_0 t \\ -\sin \omega_0 t & \cos \omega_0 t \end{bmatrix} = Ae^{At}.$$

- ▶ The solution to the initial value problem is given by

$$x(t) = e^{At}x(0) = \begin{bmatrix} \cos \omega_0 t & \sin \omega_0 t \\ -\sin \omega_0 t & \cos \omega_0 t \end{bmatrix} \begin{bmatrix} x_1(0) \\ x_2(0) \end{bmatrix}.$$

# Outline

Linear properties of LTI systems

Initial response - matrix exponential

Step, impulse and frequency responses

Summary

## Input/output responses

Consider a single-input and single output LTI system

$$\dot{x} = Ax + Bu, \quad y = Cx + Du,$$

where  $x \in \mathbb{R}^n$ ,  $u \in \mathbb{R}$ , and  $y \in \mathbb{R}$ .

- ▶ **Step input** (also known as Heaviside step function)

$$u(t) = \begin{cases} 0 & \text{if } t \leq 0 \\ 1 & \text{if } t > 0 \end{cases}$$

- ▶ **Impulse input** (also known as delta function)

$$u(t) = p_\epsilon(t) = \begin{cases} 0 & \text{if } t < 0 \\ 1/\epsilon & \text{if } 0 \leq t < \epsilon \\ 0 & \text{if } t \geq \epsilon \end{cases} \quad \delta(t) = \lim_{\epsilon \rightarrow 0} p_\epsilon(t)$$

- ▶ **Frequency input** (also known as sinusoidal excitation)


$$u(t) = \sin(\omega t + \phi).$$

## Step response

### Example (Open-loop stable system)

Consider an LTI system with

$$A = \begin{bmatrix} -1 & 4 \\ -3 & -2 \end{bmatrix}, \quad B = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad C = [1 \quad 0], \quad D = 0.$$

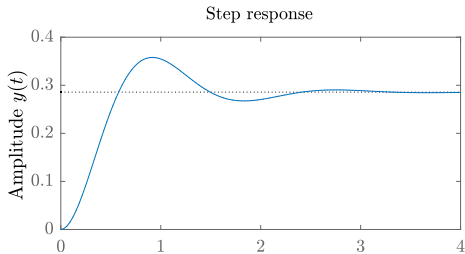


## Step response


### Example (Open-loop unstable system)

Consider an LTI system with

$$A_2 = \begin{bmatrix} 1 & 4 \\ -3 & 2 \end{bmatrix}, \quad B = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad C = [1 \quad 0], \quad D = 0.$$

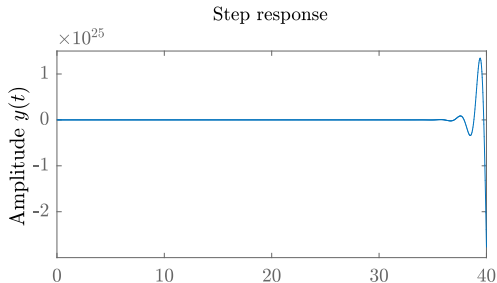

## Step response

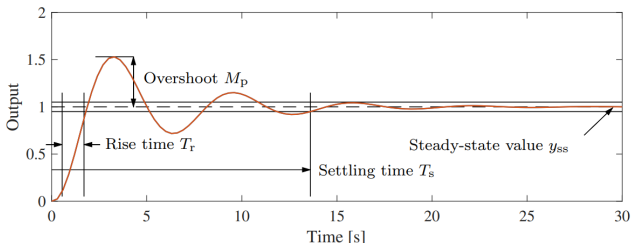

**Figure:** Sample step response. The rise time, overshoot, settling time, and steady-state value give the key performance properties of the signal.

- ▶ **Steady-state value**  $y_{ss}$ : final level of the output, assuming it converges
- ▶ **Rise time**  $T_r$ : time required for the signal to first go from 10% of its final value to 90% of its final value.
- ▶ **Overshoot**  $M_p$ : the percentage of the final value by which the signal initially rises above the final value
- ▶ **Settling time**  $T_s$ : time required for the signal to stay within 2% of its final value for all future times

# Outline

Linear properties of LTI systems

Initial response - matrix exponential

Step, impulse and frequency responses

Summary

## Summary

- ▶ The output  $y(t)$  of an LTI system has very nice **linear properties**:
  - Zero initial state  $x(0) = 0$ : *the output  $y(t)$  is linear in input  $u(t)$* ;
  - Zero input  $u(t) = 0$ : *the output  $y(t)$  is linear in initial states  $x(0)$* .
- ▶ Initial response – **matrix exponential**:
  - The solution to  $\dot{x} = Ax, x(0) \in \mathbb{R}^n$  is given by  $x(t) = e^{At}x(0)$ .
- ▶ Three very important test signals:

- **Step input**  $u(t) = \begin{cases} 0 & \text{if } t \leq 0 \\ 1 & \text{if } t > 0 \end{cases}$

- **Impulse input**

$$u(t) = p_\epsilon(t) = \begin{cases} 0 & \text{if } t < 0 \\ 1/\epsilon & \text{if } 0 \leq t < \epsilon \\ 0 & \text{if } t \geq \epsilon \end{cases} \quad \delta(t) = \lim_{\epsilon \rightarrow 0} p_\epsilon(t)$$

- **Frequency input**

$$u(t) = \sin(\omega t + \phi).$$